


**KENNEDY PROFESSIONAL Push Through Steel Handles**



1/4 Chrome - molybdenum with mirror polished finish. Push through square drive, needs only 3% movement to operate ratchet.



Type	Overall Length	Weight each	Order Code
Standard	125mm	120g	<b>-4025K</b>
Stubby	75mm	70g	<b>-4028K</b>

**Disc Type Steel Handle**

1/4 Standard wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer. Manufactured from chrome vanadium steel.



Overall Length	Number of Teeth	Weight each	Order Code
140	20	170g	<b>-4020K</b>

**Lever Reversible Rubber Handle**

1/4 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code
140mm	72	90g	<b>-4005K</b>

**Lever Reversible Steel Handle**


1/4 Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
143mm	72	120g	<b>-4015K</b>

**Spinner Handles**

1/4 **Fixed Type:** Chrome vanadium blade with spring loaded ball bearing socket retainer. **Overall length:** 150mm.



Handle Type	Weight each	Order Code
Bi-Material	110g	<b>-4190K</b>
Polypropylene	110g	<b>-4200K</b>

**Extension Bars**

1/4 Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.

**Standard**



Overall Length	Weight each	Order Code
50mm	25g	<b>-4060K</b>
100mm	50g	<b>-4080K</b>
150mm	70g	<b>-4100K</b>
250mm	115g	<b>-4120K</b>

**Flexible**

Steel wire braid allows access into obstructed areas.

Overall Length	Weight each	Order Code
150mm	150g	<b>-4140K</b>

**Wobble**

In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.



Overall Length	Weight each	Order Code
50mm	25g	<b>-4070K</b>
100mm	50g	<b>-4090K</b>
150mm	70g	<b>-4110K</b>
250mm	115g	<b>-4130K</b>

**SENATOR QUALITY TOOLING Lever Reversible Rubber Handle**




1/4 40 tooth chrome vanadium quick release ratchet with rubber grip, thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
145	40	120g	<b>-4000K</b>

**KENNEDY PROFESSIONAL Ratchet Repair Kits**

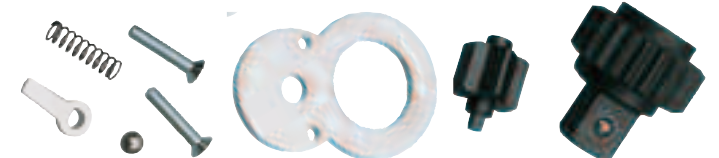

To suit Ratchet Number	Weight each	Order Code
KEN-582-4020K	30g	<b>-4280K</b>
KEN-582-4005K/4015K	30g	<b>-4290K</b>

**Swivel Handle**


1/4 The hinged link allows operation at varied angles to aid access in restricted areas. Knurled grip.



Overall Length	Weight each	Order Code
150mm	125g	<b>-4180K</b>

**KENNEDY PROFESSIONAL Sliding 'T' Handle**

1/4 Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.




Overall Length	Weight each	Order Code
105mm	50g	<b>-4040K</b>

**SOCKETS & ACCESSORIES - 1/4" SQUARE DRIVE**

**KENNEDY PROFESSIONAL Bi-Hexagon Sockets**

**1/4"** Ideal for assembly and servicing of small precision mechanisms associated with electrical, electronic, ignition and refrigeration work. All bi-hexagon unless stated.

**1/4"** Double knurl feature gives a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will give a higher torque than normal sockets. Manufactured from chrome vanadium, fully chrome plated with a mirror finish and aluminium-free to ensure non-sparking. Chamfered leading edge ensures easy fastener location.

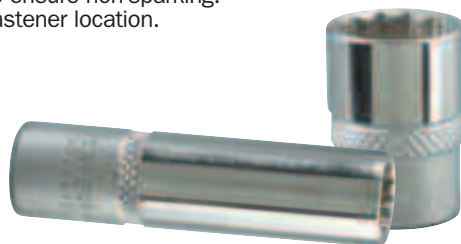

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>Metric</b>			
4.0	25mm	10g	-4300K
4.5	25mm	10g	-4310K
5.0	25mm	10g	-4320K
5.5	25mm	10g	-4330K
6.0	25mm	10g	-4340K
7.0	25mm	20g	-4350K
8.0	25mm	20g	-4360K
9.0	25mm	20g	-4370K
10.0	25mm	20g	-4380K
11.0	25mm	30g	-4390K
12.0	25mm	30g	-4400K
13.0	25mm	30g	-4410K
14.0	25mm	40g	-4420K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>Metric (Single Hex)</b>			
4.0	25mm	10g	-4540K
5.0	25mm	10g	-4542K
5.5	25mm	10g	-4543K
6.0	25mm	10g	-4544K
7.0	25mm	20g	-4545K
8.0	25mm	20g	-4546K
9.0	25mm	20g	-4547K
10.0	25mm	20g	-4548K
11.0	25mm	30g	-4549K
12.0	25mm	30g	-4550K
13.0	25mm	30g	-4551K
14.0	25mm	40g	-4552K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>Metric (Deep)</b>			
4.0	50mm	10g	-4670K
4.5	50mm	10g	-4671K
5.0	50mm	10g	-4672K
5.5	50mm	10g	-4673K
6.0	50mm	10g	-4674K
7.0	50mm	20g	-4675K
8.0	50mm	20g	-4676K
9.0	50mm	20g	-4677K
10.0	50mm	20g	-4678K
11.0	50mm	30g	-4679K
12.0	50mm	30g	-4680K
13.0	50mm	30g	-4681K
14.0	50mm	40g	-4682K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>Metric (Single Hex Deep)</b>			
6.0	50mm	10g	-4566K
7.0	50mm	10g	-4567K
8.0	50mm	10g	-4568K
9.5	50mm	10g	-4569K
10.0	50mm	10g	-4570K
11.0	50mm	20g	-4571K
12.0	50mm	20g	-4572K
13.0	50mm	20g	-4573K
14.0	50mm	40g	-4574K

**Universal Joint**

**1/4"** Hinged through 180° in both directions. Knurled for extra grip.

Drive male x female: 1/4" x 1/4".



Overall Length	Weight each	Order Code KEN-582
40mm	30g	-4160K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>AF</b>			
3/16"	25mm	10g	-4450K
7/32"	25mm	10g	-4460K
1/4"	25mm	10g	-4470K
9/32"	25mm	20g	-4480K
5/16"	25mm	20g	-4490K
11/32"	25mm	20g	-4500K
3/8"	25mm	30g	-4510K
7/16"	25mm	30g	-4520K
1/2"	25mm	30g	-4530K
9/16"	25mm	30g	-4532K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>AF (Single Hex)</b>			
3/16"	25mm	10g	-4430K
7/32"	25mm	10g	-4431K
1/4"	25mm	10g	-4432K
9/32"	25mm	20g	-4433K
5/16"	25mm	20g	-4434K
11/32"	25mm	20g	-4435K
3/8"	25mm	30g	-4436K
7/16"	25mm	30g	-4437K
1/2"	25mm	30g	-4438K
9/16"	25mm	30g	-4439K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>AF (Deep)</b>			
3/16"	50mm	10g	-4580K
7/32"	50mm	10g	-4581K
1/4"	50mm	10g	-4582K
9/32"	50mm	10g	-4583K
5/16"	50mm	10g	-4584K
11/32"	50mm	20g	-4585K
3/8"	50mm	20g	-4586K
7/16"	50mm	30g	-4588K
1/2"	50mm	50g	-4590K
9/16"	50mm	40g	-4592K

Size (mm)	Overall Length	Weight each	Order Code KEN-582
<b>AF (Single Hex Deep)</b>			
3/16"	50mm	10g	-4555K
7/32"	50mm	10g	-4556K
1/4"	50mm	10g	-4557K
9/32"	50mm	10g	-4558K
5/16"	50mm	10g	-4559K
11/32"	50mm	20g	-4560K
3/8"	50mm	20g	-4561K
7/16"	50mm	30g	-4562K
1/2"	50mm	50g	-4563K
9/16"	50mm	40g	-4564K

Drive	Overall Length	Weight each	Order Code KEN-582
<b>*Single Hex BA</b>			
0	25mm	30g	-4600K
*1	25mm	30g	-4610K
2	25mm	20g	-4620K
3	25mm	20g	-4630K
4	25mm	20g	-4640K
*5	25mm	10g	-4650K
*6	25mm	10g	-4660K

**Adaptors/Converters**

**1/4"** Chrome vanadium.

**Hex Bit Adaptor**

Converts square drive tooling to use hexagon bits.



Square Drive x Hex	Overall Length	Weight each	Order Code KEN-582
1/4" x 1/4"	25mm		-4230K

**Screwdriver Bits**

**1/4"** Manufactured from high quality chrome vanadium, fully polished finish. Conform to DIN.

Overall length: 37mm.

Bit length: 19mm.



Type	Size (mm)	Order Code KEN-582
<b>Slotted</b>		
⊖	4.0mm	-4700K
	5.5mm	-4710K
	7.0mm	-4730K
<b>Cross Point</b>		
⊕	No.1	-4750K
	No.2	-4760K
	No.3	-4770K
	No.4	-4780K
<b>Hexagon</b>		
⊙	3.0mm	-4790K
	4.0mm	-4800K
	5.0mm	-4810K
	6.0mm	-4820K
	8.0mm	-4830K
	1/8"	-4840K
	5/32"	-4850K
	3/16"	-4860K
	7/32"	-4870K
	1/4"	-4880K
	5/16"	-4890K
<b>Torx</b>		
⊗	T6	-4685K
	T7	-4686K
	T8	-4687K
	T9	-4688K
	T10	-4689K
	T15	-4690K
	T20	-4691K
	T25	-4692K
	T27	-4693K
	T30	-4694K
	T40	-4695K

**Double Ended Lug**

For connecting two female square drives



Drive	Overall Length	Weight each	Order Code KEN-582
Female x Male			
1/4" x 1/4"	25mm		-4240K

**Drive Converter**

For using a combination of square drive sockets in one application.



Drive	Overall Length	Weight each	Order Code KEN-582
Female x Male			
1/4" x 3/8"	27mm		-4220K
3/8" x 1/4"	37mm		-5180K

**HAND TOOLS**