

GROUP 582 SOCKETS & ACCESSORIES - 3/8" SQUARE DRIVE

SENATOR *Lever Reversible Rubber Handle*

3/8 With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	40	345g	SEN-582 -4940K

KENNEDY *Disc Type Steel Handle*

3/8 Basic wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	42	380g	KEN-582 -4900K

Lever Reversible Rubber Handle

3/8 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	215g	KEN-582 -4942K

KENNEDY *Swivel Handles*

3/8 The hinged link allows operation at varied angles to aid access in restricted areas.



Grip	Overall Length	Weight each	Order Code
Steel	225mm	310g	-5060K
Rubber	225mm	225g	-5160K

Heavy Duty American Pattern



Grip	Overall Length	Weight each	Order Code
American	225mm	310g	-5065K
Components			
Replacement Knuckle			-5068K

YAMOTO *Quick Release Ratchet Handle*




3/8 With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	345g	YMT-582 -4942K

Push Through Rubber Handle


3/8 A very economic wrench with a one way ratchet. Push through square drive allows left and right hand operation.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	41	205g	KEN-582 -4930K

Clutch Type Drive Push Through Steel Handles


3/8 Chrome - molybdenum with mirror polished finish. Clutch type drive action Push through square drive, needs only 3% movement to operate ratchet.

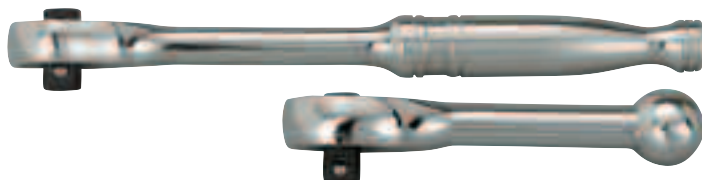

Type	Overall Length	Weight each	Order Code
Standard	180mm	220g	KEN-582 -4945K
Stubby	105mm	120g	-4948K

Lever Reversible Steel Handle

3/8 Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall Length	Number of Teeth	Weight each	Order Code
200mm	72	205g	KEN-582 -4932K

Ratchet Repair Kits



To suit Ratchet Number	Weight each	Order Code
KEN-582-4900K	70g	-5220K
KEN-582-4932/4942K	70g	-5215K
KEN-582-4940K	70g	-5235K

YAMOTO *Swivel Handle*



3/8 Chrome finish. American style handle.



Overall Length	Weight each	Order Code
225mm	310g	YMT-582 -5060K

HAND TOOLS


Socket Styles

Used in automotive and aerospace. The weight to strength ratio ensures the reliability and accessibility that is so important in this type of production environment.




Bi-Hexagon Sockets

12 point – side drive design gives a higher torque than normal sockets, grip worn nuts and will not round off existing nuts. All have a ball-retaining groove on each face of the square drive, which ensures a positive fit with accessories. Require only a one-twelfth turn to engage the next point of the socket.



Single-Hexagon Sockets

6 point - Offer a more positive location, particularly on worn or rounded nuts, but require a one-sixth turn to engage the next point of the socket.



TX Sockets

Chrome vanadium. For use with male headed TX fasteners commonly found in the automotive industry. 29mm overall length and each weighing 45g.



Size	Order Code KEN-582
E6	-5960K
E8	-5962K
E10	-5964K
E12	-5966K
E14	-5968K
E16	-5970K

Bi-Hexagon Standard Length Sockets



Type	Size	Overall Length	Weight each
Metric	6mm	26	30g
	7mm	26	30g
	8mm	26	30g
	9mm	26	30g
	10mm	26	30g
	11mm	26	30g
	12mm	26	30g
	13mm	26	30g
	14mm	30	40g
	15mm	30	40g
	16mm	30	50g
	17mm	30	60g
AF	18mm	30	70g
	19mm	30	70g
	20mm	30	80g
	21mm	30	80g
	22mm	27	100g
	1/4"	27	30g
	5/16"	27	30g
	11/32"	27	30g
	3/8"	27	30g
	7/16"	27	30g
	1/2"	27	30g
	9/16"	27	40g
5/8"	27	50g	
11/16"	30	60g	
3/4"	25	70g	
13/16"	27	80g	
7/8"	27	10g	
1/8"	27	35g	
3/16"	27	45g	
1/4"	30	45g	
5/16"	30	45g	
3/8"	30	45g	
7/16"	30	85g	
1/2"	30	120g	

Order Code KEN-582
-5240K
-5250K
-5260K
-5270K
-5280K
-5290K
-5300K
-5310K
-5320K
-5330K
-5340K
-5350K
-5360K
-5370K
-5380K
-5390K
-5400K
-5430K
-5440K
-5450K
-5460K
-5470K
-5480K
-5490K
-5500K
-5510K
-5520K
-5530K
-5540K
-5580K
-5590K
-5600K
-5610K
-5620K
-5630K
-5640K

Order Code YMT-582
-5240K
-5250K
-5260K
-5270K
-5280K
-5290K
-5300K
-5310K
-5320K
-5330K
-5340K
-5350K
-5360K
-5370K
-5380K
-5390K
-5400K
-5430K
-5440K
-5450K
-5460K
-5470K
-5480K
-5490K
-5500K
-5510K
-5520K
-5530K
-5540K
-
-
-
-
-
-

Deep Sockets



Type	Size	Overall Length	Weight each
Metric	8mm	62	40g
	9mm	62	40g
	10mm	62	50g
	11mm	62	50g
	12mm	62	60g
	13mm	62	60g
	14mm	62	70g
	15mm	62	100g
	16mm	62	115g
	17mm	62	130g
	18mm	64	120g
	19mm	64	140g
AF	21mm	64	155g
	22mm	64	200g
	3/8"	63	45g
	7/16"	63	50g
	1/2"	63	60g
	9/16"	63	60g
	5/8"	65	110g
	11/16"	65	120g
	3/4"	65	135g
	13/16"	65	160g

Order Code KEN-582
-5700K
-5710K
-5720K
-5730K
-5740K
-5750K
-5760K
-5770K
-5780K
-5790K
-5800K
-5810K
-5820K
-5830K
-5870K
-5880K
-5890K
-5900K
-5910K
-5920K
-5930K
-5940K

Order Code YMT-582
-
-
-5720K
-5730K
-5740K
-5750K
-5760K
-5770K
-
-5790K
-
-5810K
-
-5830K
-5870K
-5880K
-5890K
-5900K
-5910K
-5920K
-5930K
-5940K

Single-Hexagon Standard Length



Type	Size	Overall Length	Weight each	Order Code KEN-582
Metric Single Hex	6mm	26	30g	-5544K
	7mm	26	30g	-5555K
	8mm	26	30g	-5556K
	9mm	26	30g	-5557K
	10mm	26	30g	-5558K
	11mm	26	30g	-5559K
	12mm	26	30g	-5560K
	13mm	26	30g	-5561K
	14mm	30	40g	-5562K
	15mm	30	40g	-5563K
	16mm	30	50g	-5564K
	17mm	30	60g	-5565K
AF	18mm	30	70g	-5566K
	19mm	30	70g	-5567K

SOCKETS & ACCESSORIES - 3/8" SQUARE DRIVE

KENNEDY PROFESSIONAL Double Lug


3/8" Chrome vanadium.
For connecting two female square drives. 25mm long.



Drive Male x Male	Weight each	Order Code
3/8" x 3/8"	10g	-5170K

Female/Male Converters

3/8" Chrome vanadium.
For using a combination of square drive socketry in the same application.



Drive Female x Male	Weight each	Order Code
3/8" x 1/4"	20g	-5180K
3/8" x 1/2"	40g	-5190K
1/2" x 3/8"	50g	-6700K

Hex Bit Adaptor

3/8" Chrome vanadium.
For converting square drive tooling to use hexagon bits.



Drive x Hex	Overall Length	Weight each	Order Code
3/8"x1/4"	30mm	30g	-5200K

Spark Plug Sockets

3/8" Designed for insertion and removal of the spark plug. The neoprene insert helps retain and protect the insulation from accidental damage.



Size (Plug)	Overall Length	Weight each	Order Code
M10	65mm	110g	-5670K
M12	65mm	110g	-5680K
M14	68mm	140g	-5660K

YAMOTO INDUSTRIAL SOCKET SETS Spark Plug Sockets

3/8" For insertion and removal of spark plugs. Neoprene insert helps retain the spark plug and protect the insulation material from damage.



Size (Plug)	Overall Length	Weight each	Order Code
M10	65mm	110g	-5670K
M14	68mm	140g	-5660K

Hex Bit Adaptor

3/8" Chrome vanadium.
For converting square drive tooling to use hexagon bits.



Drive x Hex	Overall Length	Weight each	Order Code
3/8"x1/4"	30mm	15g	-5200K

Screwdriver Bit Sockets

Often used in the automotive and aerospace industries. The weight to strength ratio ensures the reliability and accessibility that is important in this type of environment. Made from chrome vanadium steel, fully chrome plated with an aluminium free mirror finish. All have ball retaining grooves. Conform to **DIN standards**.



KENNEDY PROFESSIONAL

YAMOTO INDUSTRIAL SOCKET SETS

Size	Bit Lgth (mm)	Overall Lgth (mm)	Weight each
Hexagon			
3mm	20	50	25g
4mm	20	50	30g
5mm	20	50	30g
6mm	20	50	35g
8mm	20	50	45g
10mm	20	50	55g
1/8"	20	50	25g
5/32"	20	50	30g
3/16"	20	50	30g
7/32"	20	50	35g
1/4"	20	50	40g
5/16"	20	50	45g
3/8"	20	50	55g
Crosspoint			
No 1	20	50	50g
No 2	20	50	50g
No 3	20	50	55g
No 4	20	50	55g
PZ			
No 1	20	50	50g
No 2	20	50	50g
No 3	20	50	55g
Slotted			
3/16"	20	50	50g
7/32"	20	50	50g
1/4"	20	50	55g
TX			
T6	20	50	50g
T7	20	50	50g
T8	20	50	50g
T9	20	50	50g
T10	20	50	50g
T15	20	50	50g
T20	20	50	55g
T25	20	50	50g
T27	20	50	55g
T30	20	50	55g
T40	20	50	55g
T45	20	50	55g
T50	20	50	55g

Order Code **KEN-582**

Order Code **YMT-582**

-6000K
-6010K
-6020K
-6030K
-6040K
-6050K
-6080K
-6090K
-6100K
-6110K
-6120K
-6130K
-6140K

-6000K
-6010K
-6020K
-6030K
-6040K
-6050K
-
-
-
-
-
-
-

-6201K
-6202K
-6203K
-6204K

-6201K
-6202K
-6203K
-

-6211K
-6212K
-6213K

-
-
-

-6222K
-6223K
-6224K

-6222K
-
-6224K

-6231K
-6232K
-6233K
-6234K
-6235K
-6236K
-6237K
-6238K
-6239K
-6241K
-6242K
-6243K
-6244K

-
-
-
-
-6235K
-6236K
-6237K
-6238K
-
-6241K
-6242K
-
-6244K

KENNEDY PROFESSIONAL Long Screwdriver Bit Sockets & Socket Bit Sets

Ideal for accessing deep seated bolts that have been fitted knurled bodies for extra grip. Made from S2 chrome vanadium. Supplied on storage rail.

Hexagon



6 Piece Set Contents:
4, 5, 6, 7, 8, 10mm.

6 PIECES

TX



6 Piece Set Contents:
T20, T25, T30, T40 T45 and T50

Bit Sets

Description	Weight each	Order Code
Hexagon 6 Piece Set	310g	-6324K
TX 6 Piece Set	410g	-6340K

Individual Bits - Hexagon

Size	Overall Length	Weight each	Order Code
4mm	100mm	40g	-6314K
5mm	100mm	40g	-6315K
6mm	100mm	45g	-6316K
7mm	100mm	45g	-6317K
8mm	100mm	55g	-6318K
10mm	100mm	65g	-6320K

Individual Bits - TX

Size	Overall Length	Weight each	Order Code
T20	95mm	65g	-6330K
T25	95mm	65g	-6331K
T30	95mm	65g	-6332K
T40	95mm	65g	-6334K
T45	95mm	65g	-6335K
T50	95mm	65g	-6336K