

GROUP 501 ADJUSTABLE WRENCHES

KENNEDY PROFESSIONAL Cushion Grip Adjustable Wrenches

Drop forged chrome vanadium steel with phosphate anti-corrosion finish. Hardened parallel opening jaws are ground and polished, laser etched with metric graduations for rapid repeatable reference setting. The wide grooved profile of the opening mechanism and coarsely knurled adjusting screw ensures smooth adjustment. Slim head profile allows easy access, the contoured jaws improve grip when used on damaged misshaped fasteners. The unique geomatic cushion grip improves user comfort, is resistant to oil and grease to provide a slip free grip. Securely bonded to the I-beam handle sub frame to prevent the ingress of oil and dirt.

Conforms to: **BS 6333-1995, DIN3117-1988.**



Tapered Jaw For Access Into Tight Spaces.



Kennedy Professional 150mm Wrench
Jaw capacity: 24mm

UP TO 20% GREATER JAW CAPACITY THAN CONVENTIONAL ADJUSTABLE WRENCHES

Conventional 150mm Wrench
Jaw capacity: 20mm

HAND TOOLS

GROOVED JAW FOR POSITIVE GRIP EVEN ON WORN SURFACES

15°

Length (mm)	Jaw Opening	Fastener Range	Weight each	Order Code KEN-501
150 (6")	23.9mm	M2-M14 (1/8" - 9/16")	140g	-3060K
200 (8")	28.6mm	M4-M18 (3/16" - 5/8")	260g	-3080K
250 (10")	32.8mm	M6-M20 (1/4" - 3/4")	400g	-3100K
300 (12")	38.1mm	M8-M24 (5/16" - 1")	650g	-3120K

Twin Pack

2 PIECES

Contents	Weight each	Order Code KEN-501
200 & 300mm	800g	-0640K

KENNEDY QUALITY INDUSTRIAL TOOLING Extra Wide Jaw Adjustable Wrench

Drop forged chrome vanadium steel. Rubber comfort grip handle. Ideal for use in plumbing, installation and automotive applications. Ultra thin head designed for use in confined spaces. Graduated millimetre scale. More than 50% wider jaw compared to conventional adjustable wrenches.

Conforms to: **ISO 6787-1982, ASME B.107.8M-1996, BS 6333-1995, DIN3117-1988, JIS B4604-1976.**



Length (mm)	Jaw Opening (mm)	Weight each	Order Code KEN-501
150 (6")	34.0	176g	-5060K
200 (8")	38.0	315g	-5080K
250 (10")	50.0	554g	-5100K
300 (12")	60.0	868g	-5120K

Combi Grip Adjustable Wrenches

These wrenches have a quick release reversible lower jaw with a serrated side with extra hard teeth for pipe gripping, a strong handle and a phosphated corrosion resistant finish. The smooth adjusting action makes them fast and easy to use. Conform to: **ISO 6787-1982, ASME B.107.8M-1996, BS 6333-1995, DIN 3117-1988, JIS B4604-1976.**



Length (mm)	Jaw Opening (mm)	Weight each	Order Code KEN-501
250 (10")	30.0	345g	-4100K
300 (12")	35.0	890g	-4120K

ADJUSTABLE WRENCHES

KENNEDY Adjustable Wrenches
QUALITY INDUSTRIAL TOOLING

Manufactured from high strength 1' beam section chrome or phosphate vanadium steel for improved strength and rigidity, the jaws are heat treated for extended tool life. High polished corrosion-resistant finish. 15° offset head angle for positive torque control. Slimline tapered jaws for improved access into confined spaces. Parallel jaws with smooth jaw adjustment and self-locking design prevents the jaws opening unintentionally even when under full load. Suitable for industrial engineering, automotive, agricultural, maintenance and assembly applications.

Conforms to: **BS 6333-1995, DIN3117-1988.**




Tapered Jaw For Access Into Tight Spaces

UP TO 20% GREATER JAW CAPACITY THAN CONVENTIONAL ADJUSTABLE WRENCHES



Conventional 375mm Wrench
Jaw capacity 40mm.

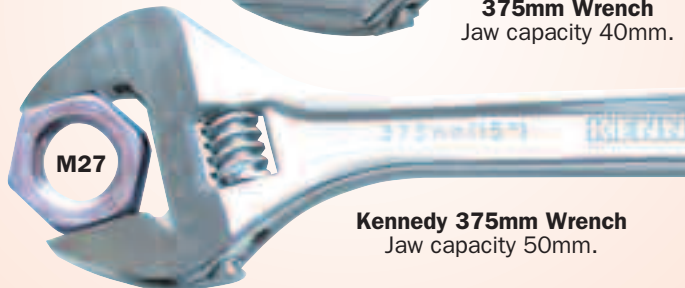

Kennedy 375mm Wrench
Jaw capacity 50mm.



Phosphate Finish

Phosphate Finish

Phosphate Finish

Length (mm)	Jaw Opening (mm)	Torque (kg/cm)	Weight each	Order Code KEN-501
100 (4")	17 (21/32")	714	60g	-0040K
150 (6")	24 (1")	1670	140g	-0060K
200 (8")	28 (1 3/32")	3100	260g	-0080K
250 (10")	33 (1 5/16")	5190	400g	-0100K
300 (12")	38 (1 3/8")	8820	650g	-0120K
375 (15")	50 (2")	17295	1040g	-0150K
450 (18")	60 (2 3/8")	23060	1670g	-0180K
600 (24")	70 (2 3/4")	25000	3300g	-0240K

Chrome Finish

Length (mm)	Jaw Opening (mm)	Torque (kg/cm)	Weight each	Order Code KEN-501
100 (4")	17 (21/32")	714	60g	-1040K
150 (6")	24 (1")	1670	140g	-1060K
200 (8")	28 (1 3/32")	3100	260g	-1080K
250 (10")	33 (1 5/16")	5190	400g	-1100K
300 (12")	38 (1 3/8")	8820	650g	-1120K
375 (15")	50 (2")	17295	1040g	-1150K
450 (18")	60 (2 3/8")	23060	1670g	-1180K

Phosphate Finish Sets

2 PIECES **3 PIECES**



Number of Pieces	Contents	Weight each	Order Code KEN-501
3	100, 200 & 300mm	1100g	-0600K
2	150 & 250mm	540g	-0620K

Chrome Finish Set

3 PIECES



Number of Pieces	Contents	Weight each	Order Code KEN-501
3	100, 200 & 300mm	1100g	-1600K

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

HAND TOOLS