

GROUP 572 SCREWDRIVERS


KENNEDY *Insulated Interchangeable Screwdriver Set*


Ergonomic insulated full size handle, swivel cap and eight interchangeable drivers supplied in a compact protective pouch with belt loop. 2-in-1 design, use the detachable swivel cap for fast (low torque) driving, or use the full size detachable ergonomic handle for higher torque fastening. Safe up to 1000V AC/1500V DC.




**10
PIECES**

10 Piece Set Contents (mm):

 0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100 and 1.2 x 6.5 x 100.


 No.0 x 100, No.1 x 100 and No.2 x 100.

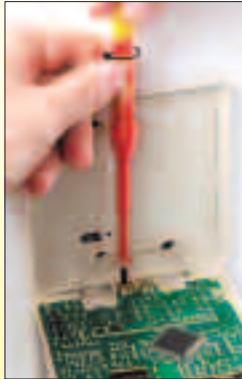

Number of Pieces	Weight each	Order Code
10	365g	KEN-572 -5870K

1000V Dual Grip VDE Screwdrivers

A fully insulated screwdriver VDE tested up to 1000V. Professional high grip handles, magnetic tips, chrome vanadium steel blades.

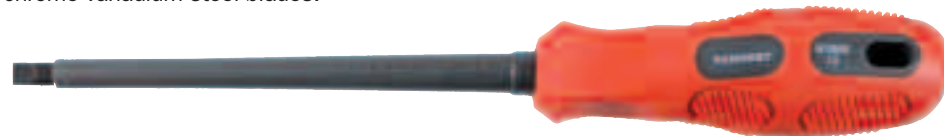

Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



Parallel Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.




Tip Size	Blade Length	Weight each	Order Code
No.0	60mm	20g	-7900K
No.1	80mm	60g	-7910K
No.2	100mm	90g	-7920K

Tip Size	Blade Length	Weight each	Order Code
2.5mm	75mm	20g	-7940K
4.0mm	100mm	60g	-7950K
5.5mm	125mm	75g	-7960K
6.5mm	150mm	110g	-7970K

Set Contents (mm):

 2.5 x 75, 4.0 x 100, 5.5 x 125, 6.5 x 150.

 No.0 x 60, No.1 x 80, No.2 x 100.

**7
PIECES**

Number of Pieces	Weight each	Order Code
7	715g	KEN-572 -8000K



Electrician's VDE Square Section Handle Screwdrivers

Volt-tested to ensure safety on or near electrical equipment up to 1000V AC or 1500V DC. Insulated blades with magnetic tips. Conform with **DIN 7438** and **DIN EN 60900**.



Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.



Parallel Tip


Slotted head screws are the most commonly used screw. The tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping.




Tip Size	Blade Length	Weight each	Order Code
No.0	75mm	27g	-5820K
No.1	100mm	50g	-5830K
No.2	100mm	80g	-5840K

Tip Size	Blade Length	Weight each	Order Code
2.5mm	85mm	30g	-5760K
4.0mm	100mm	45g	-5780K
5.5mm	125mm	80g	-5790K
6.5mm	150mm	100g	-5800K

Set Contents (mm):
Supplied in clear plastic wallet.

 2.5 x 85, 4.0 x 100, 5.5 x 125, 6.5 x 150.

 No.0 x 75, No.1 x 100, No.2 x 100.

**7
PIECES**

Number of Pieces	Weight each	Order Code
7	495g	KEN-572 -5900K

