

KOBE Impact Wrench



G7321

Suitable for light workshop and garage use. Twin hammer mechanism with a 4-point adjustable air (speed) forward/reverse speed regulator. Ergonomic and comfortable handle grip with vibration dampening a fixed inlet and exhaust. One finger stop/start trigger operation. Downward facing external exhaust in handle.
Free speed: 10,100rpm, forward: position 1: 8,000rpm, position 2: 9,100rpm, position 3: 10,100rpm, reverse: 10,200rpm.

Maximum torque: 393Nm (290ft/lbs).
Working torque: 339Nm (250ft/lbs).
Recommended air pressure: 6.2bar (90psi).
Air consumption: 3.4cfm*
Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 10mm (3/8").
Overall length: 160mm.



Free Speed (rpm)	Weight each	Order Code
10,100		KBE-270
		-5820K

*Based on a 15 second cycle per minute average use.

KOBE Impact Wrench



B7444

Suitable for production and assembly applications. Twin hammer mechanism. Three position dial style speed regulator. Forward/reverse selection. Ergonomic and comfortable handle grip. Fixed inlet and exhaust.
Forward: position 1: 4,000rpm, position 2: 5,000rpm, position 3: 7,000rpm.
Reverse: position 1: 3,000rpm, position 2: 5,000rpm, position 3: 7,000rpm.
Collet size: 1/2" (13mm).
Free speed: 7,000rpm.

Maximum torque: 813Nm (600ft/lbs).
Recommended air pressure: 6.2bar/90psi.
Air consumption: 4cfm* (1.13ltr/min).
Air inlet thread: 1/4" NPT.
Minimum air hose size (ID): 10mm (3/8").
Sound pressure level: 83dBA.
Sound power level: 90dBA.
Vibration level: 6.8m/s².
Overall length: 183mm.



Free Speed (rpm)	Weight each	Order Code
7,000	1.94g	KBE-270
		-4040K

*Based on a 15 second cycle per minute average use.

KOBE Impact Wrench



IW500

One piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 90psi air pressure, 300ft/lbs torque, 4cfm* air consumption, 16mm bolt capacity.
Sound pressure level: 88dBA. **Sound power level:** N/A dBA.
Vibration level: 4.2m/s². **Overall length:** 191mm.



Free Speed (rpm)	Weight each	Order Code
7,000	2.30kg	KBE-270
		-2316P

*Based on a 15 second cycle per minute average use.

Impact Wrench Kit



IWS500

Kit supplied complete in robust blow-moulded case.
Includes: 1/2" impact wrench IW500. 10 metric sockets: 9 - 27mm. Threaded tailpiece, in-line mini-oiler and oil bottle.
 One piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 90psi air pressure, 300ft/lbs torque, 4cfm* air consumption, 16mm bolt capacity.
Sound pressure level: 93dBA. **Sound power level:** N/A dBA.
Vibration level: 1.219m/s². **Overall length:** 191mm.



Free Speed (rpm)	Weight each	Order Code
7,000	4.30kg	KBE-270
		-2350K

*Based on a 15 second cycle per minute average use.

KOBE Impact Wrench



3/4

IW750

One-piece aluminium housing, 10 position power regulator, thumb switch for reversing, 1/4" NPT air inlet thread for 10mm air hose, 25mm bolt capacity. 90psi air pressure, 7.5cfm* air consumption. 500ft/lbs torque.

Sound pressure level: 83dBA.
Sound power level: N/A dBA.
Vibration level: 0.449m/s².
Overall length: 245mm.



Free Speed (rpm)	Weight each	Order Code
4,200	5.00kg	-2325S

*Based on a 15 second cycle per minute average use.

KOBE Pistol Grip Air Impact Wrench



1

IWP100-X

Suitable for industrial and commercial production and assembly applications. Front or rear mounting spring balance loop. Forward/reverse switch and three position power regulator. Forward facing exhaust. Oiling points for daily maintenance.

Free speed: 3,400rpm.
Final drive: 1" (25mm) hex.



Working torque: 2,170Nm (1600lb/ft).
Maximum torque: 2,440Nm (1800lb/ft).
Air inlet thread: 1/2" NPT.
Minimum air hose size (ID): 1/2" (13mm).
Air pressure: 6.3bar/90psi.
Air consumption: 5.95cfm.
Sound pressure level: 87dBA.
Vibration level: 5.9m/s².
Overall length: 295mm.



Free Speed (rpm)	Weight each	Order Code
3,400	9.70kg	-1620A

*Based on a 15 second cycle per minute average use.


KOBE Heavy Duty In-Line Air Impact Wrench



1


1" square drive. Suitable for industrial and commercial production and assembly applications. Side handle for two-handed operation. Top mounted spring balance loop. Easy to use forward/reverse switch and three position power regulator. Top venting exhaust. Oiling points for daily maintenance.

Free speed: 3,300rpm.
Final drive: 1" (25mm) hex.
Working torque: 2,030Nm (1500lb/ft).
Maximum torque: 2,300Nm (1700lb/ft).
Safe working pressure: 6.2bar/90psi.
Air inlet thread: 1/2" NPT.
Minimum air hose size (ID): 1/2" (13mm).
Air pressure: 6.3bar/90psi.
Air consumption: 7.0cfm.
Sound pressure level: 87dBA.
Vibration level: 5.9m/s².
Overall length: 500mm.

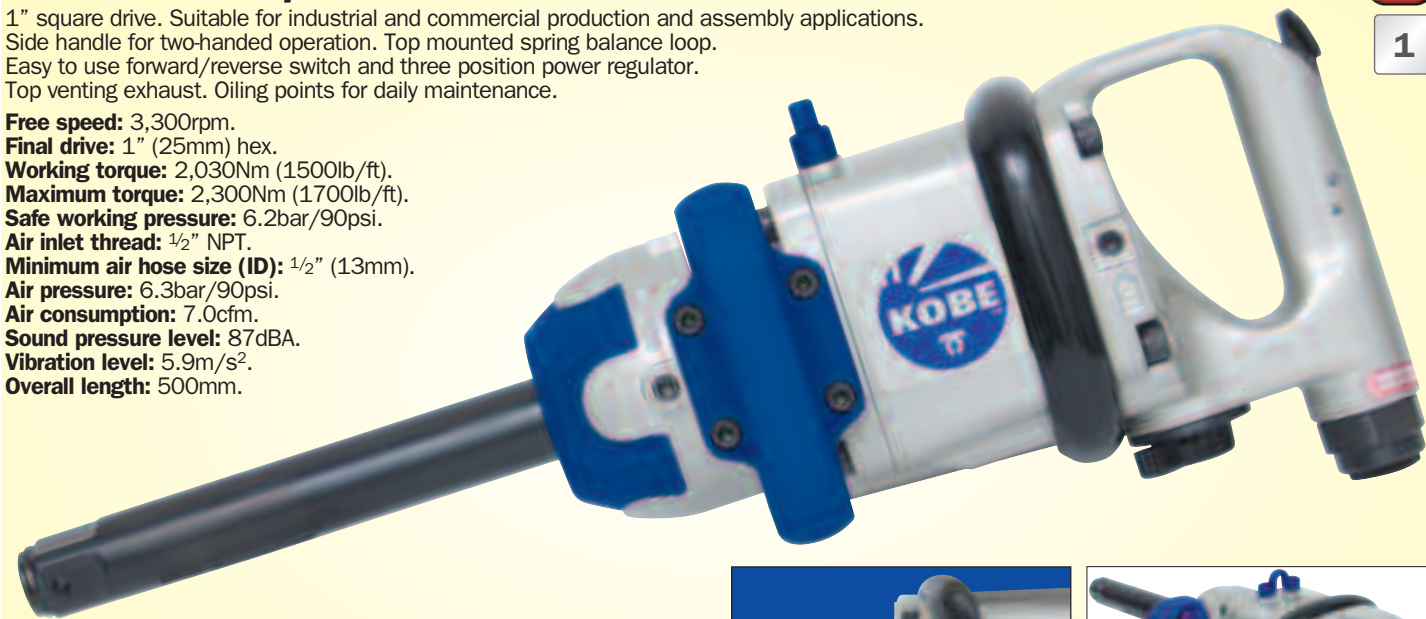

Free Speed (rpm)	Weight each	Order Code
3,300	9.34kg	-1630B

*Based on a 15 second cycle per minute average use.



ABRASIVES & POWER TOOLS