

**KENNEDY** **3 Tonne Quick Lift Trolley Jack**  
QUALITY INDUSTRIAL TOOLING

3 tonne capacity. One stroke instant lift foot pedal, raises the saddle up to jack point to increase productivity. Constructed from heavy gauge steel. 1m, two-piece handle. 120mm diameter saddle. Automatic safety overload protection. Positive twist, lock and release mechanism. Heavy duty rear swivelling castor wheels.

**Maximum load:** 3000kg.  
**Minimum height:** 145mm.  
**Maximum height:** 490mm.



Capacity	Weight each	Order Code
3 Tonne	39.5kg	<b>KEN-503</b> <b>-7100K</b>

**Scissor Jack**

Made from heavy-duty steel with a rubber saddle which provides a positive grip and prevents damage to jacking points. Designed to safely raise vehicles. Easy to use and compact for easy storage. 1 Tonne (1000kg) safe working load. Wide base plate for extra stability.




**Lifting range:** 88 - 383mm.  
**Base plate size:** 150 x 90mm.  
**Spindle thread:** 12.5 x 2.5mm.

Model Number	Capacity	Weight each	Order Code
KSJ010	1 Tonne	2.80kg	<b>KEN-503</b> <b>-5920K</b>

**Ratcheting Axle Stands**

Suitable for supporting raised vehicles or equipment. Protective red enamel coating. 10-position ratchet design that automatically locks when raised.

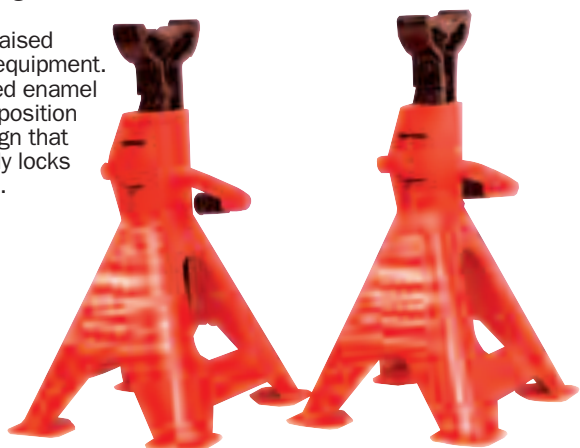

Capacity/pair	Per Stand	Min. - Max. Height	Order Code
4 Tonne (4000kg)	2T	265-418mm	<b>KEN-503</b> <b>-5520K</b>
6 Tonne (6000kg)	3T	280-420mm	<b>-5530K</b>
12 Tonne (12000kg)	6T	390-608mm	<b>-5560K</b>

**Trolley Jack**

Strong steel chassis provides stability when under load. Fixed direction castors and swivel castors for easier positioning under vehicles. Long reach single piece pump handle with comfort rubber for rapid raising and lower. Safety overload protection valve prevents overload damage to hydraulic mechanism. Integral carry handle.

**GS and TUV approved.**

**T238**  
**Type:** with case.  
**Dimensions:** 525 x 225 x 145mm.

**T2.249**  
**Type:** with case.  
**Dimensions:** 695 x 344 x 180mm.

**T280**  
**Type:** long reach.  
**Dimensions:** 1150 x 360 x 210mm.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code
T238	2000kg	130 - 380	12.0kg	<b>KEN-503</b> <b>-6320K</b>
T2.249	2250kg	145 - 495	36.5kg	<b>-6350K</b>
T280	2000kg	140 - 800	58.0kg	<b>-6920K</b>
HTJ03	3000kg	150 - 490	36.5kg	<b>-6360K</b>

**Spares**

Description	Weight each	Order Code
Torsion Spring for T280	49g	<b>KEN-567</b> <b>-7880K</b>
Torsion Spring for T2.249	49g	<b>-7860K</b>
Seal Repair Kit for T238	7g	<b>-8160K</b>
Seal Repair Kit for T2.249	4g	<b>-8180K</b>

**SENATOR** **Hydraulic Trolley Jacks**  
QUALITY TOOLING

Featuring steel chassis for stability, swivel castors for easier positioning and 1 piece handle with rubber grip for extra comfort. With overload protection valve, separate release mechanism and integral carry handle.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code
STJ330	2000kg	135 - 330	8.50kg	<b>SEN-503</b> <b>-6320K</b>
STJ410	3000kg	130 - 410	15.84kg	<b>-6360K</b>

Description	Weight each	Order Code
Seal Repair Kit for STJ330	7g	<b>SEN-567</b> <b>-0510K</b>
Seal Repair Kit for STJ410	4g	<b>-0500K</b>

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**