

**1" Drive** The ultimate for high torque hand applications. Designed to give strength and reliability under heavy loads. Used extensively in heavy plant, rail, shipyard and oil rig industries.



**Lever Type Steel Handle with Extension**



**Sliding 'T'-Handle with Extension**

**Lever Type Steel Handle**

**1** Basic wrench with satin finish. Fitted with spring loaded ball bearing socket retainer.




Overall Length	Number of Teeth	Weight each	Order Code <b>KEN-582</b>
740mm	40	5.40kg	<b>-8980K</b>

Spares	Description	Order Code <b>KEN-582</b>
	Ratchet Repair Kit	<b>-8990K</b>

**Sliding 'T' Handle**


**1** Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.

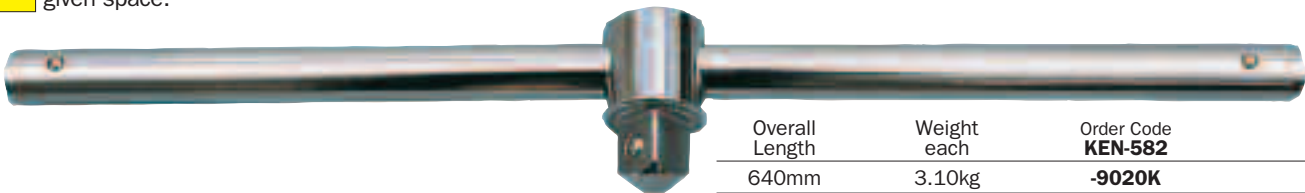

Overall Length	Weight each	Order Code <b>KEN-582</b>
640mm	3.10kg	<b>-9020K</b>

**Extensions**


**1** Manufactured from high quality chrome vanadium with a fully polished finish. Knurled 'finger grip'.

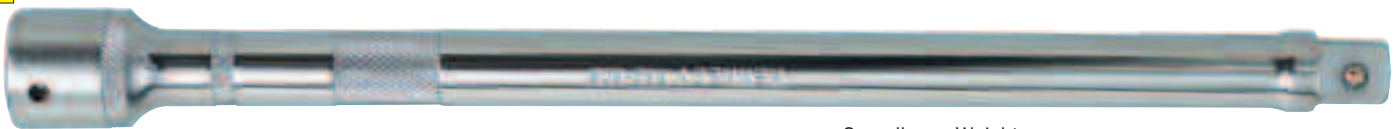

Description	Overall Length	Weight each	Order Code <b>KEN-582</b>
Standard	200mm	1.00kg	<b>-9040K</b>
	400mm	1.80kg	<b>-9060K</b>

**Bi-Hexagon Standard Sockets**

**1** Bi-hexagon. (12 point). This range of 1" (25mm) series sockets is the ultimate for high torque hand applications. The Bi-hexagon design gives strength and reliability under heavy loads. Used extensively in heavy plant, rail, shipyard and oil rig industries. The 12 point bi-hexagon side drive design gives a higher torque than normal sockets. Made from chrome vanadium and fully chrome plated with an aluminium free mirror finish. Chamfered leading edge ensures easy fastener location.

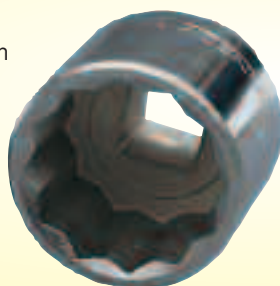

Type	Size	Overall Length	Weight each	Order Code <b>KEN-582</b>
Metric	36mm	65	280g	<b>-9200K</b>
	41mm	65	330g	<b>-9210K</b>
	46mm	70	360g	<b>-9220K</b>
	50mm	75	360g	<b>-9230K</b>
	55mm	80	400g	<b>-9240K</b>
	60mm	85	420g	<b>-9250K</b>
AF	65mm	90	450g	<b>-9260K</b>
	70mm	100	480g	<b>-9270K</b>
	75mm	100	520g	<b>-9280K</b>
	80mm	110	550g	<b>-9290K</b>
	1 1/2"	70	300g	<b>-9360K</b>
	2"	70	360g	<b>-9400K</b>
	2 1/4"	85	400g	<b>-9420K</b>
	2 3/8"	85	400g	<b>-9430K</b>