

GROUP 270 AIR TOOLS - GRINDERS

KOBE 100mm Angle Grinder

100 mm



GA1011L

Adjustable safety guard, safety lever throttle. Supplied with auxiliary side handle, flanges and spanners, lightweight and compact. 100 x 3 x 16mm cut-off disc.

Air inlet thread: 1/4" NPT. **Spindle thread:** 3/8" - 24.

Minimum air hose size: 10mm (3/8").

Air pressure: 6.3bar (90psi).

Air consumption: 6cfm* (216ltr/min).


Motor power: 0.7hp.

Sound pressure level: 89dBA.

Sound power level: 96dBA.

Vibration level: 4.0m/s².

Overall length: 230mm.

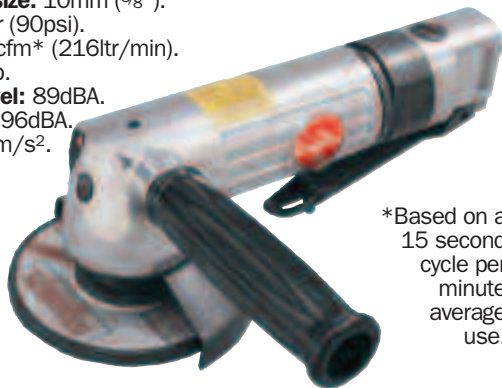

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code
11,000	1.80kg	-2050P

115mm Angle Grinder

GA1211L

Suitable for grinding, cutting-off and sanding. Safety lever throttle. Supplied with auxiliary side handle, flanges and spanners. 115 x 3 x 22mm cut off disc.

Air inlet thread: 1/4" NPT. **Spindle thread:** M10 x 1.5mm.

Minimum air hose size: 10mm (3/8").

Air pressure: 6.3bar (90psi).

Air consumption: 6cfm* (216ltr/min).

Motor power: 0.7hp.

Sound pressure level: 89dBA.

Sound power level: 96dBA.

Vibration level: 4.0m/s².

Overall length: 240mm.



*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code
11,000	1.80kg	-2060Q

180mm Heavy Duty Angle Grinder

GA1807L

Supplied with front exhaust, safety lever throttle, auxiliary side handle and adjustable safety guard. For grinding only.

Air inlet thread: 1/4" NPT. **Spindle thread:** 5/8" UNC.

Minimum air hose size (ID): 10mm.

Air pressure: 90psi. **Air consumption:** 6cfm*.

Sound pressure level: 103dBA.

Sound power level: 109dBA.



Vibration level: 2.6m/s².
Overall length: 340mm.

*Based on a 15 second cycle per minute average use.

Free Speed (rpm)	Weight each	Order Code
7,000	3.50kg	-2070R

KOBE 50mm Mini Angle Grinder

50 mm



FAG050M

For metal dressing, rust removal, weld preparation and automotive bodywork fabrication in hard to reach areas. Speed regulator. Safety release throttle. Heavy duty disc guard. Side exhaust. Ball bearing construction. Supplied with: 2x A60 (KEN230-0040K), 1x A80 (KEN230-0050K) and 1x A120 (KEN230-0060K) 50mm grinding discs.

Disc size: 50 x 4 x 9.6mm (2" x 5/32" x 3/8").

Air inlet thread: 1/4" NPT.

Minimum air hose size (ID): 3/8" (10mm).

Air pressure: 90psi/6.3bar.

Air consumption: 4cfm*.


Sound pressure level: 83dBA.

Sound power level: 92dBA.

Vibration level: 1.7m/s².

Overall length: 140mm.

*Based on a 15 second cycle per minute average use.



Free Speed (rpm)	Weight each	Order Code
20,000	530g	-2090K

115 & 125mm Angle Grinder

Suitable for metal dressing, rust removal, weld preparation and automotive bodywork fabrication. Rubber-cushioned side handle provides grip and operator comfort.

Free speed: 10,000rpm (governed). **Air inlet thread:** 1/4" NPT.

Spindle thread: M14 x 2.0mm. **Minimum air hose size:** 10mm (3/8").

Air pressure: 6.2bar (90psi). **Air consumption:** 4cfm* (113ltr/min).

Motor power: 0.7hp.

Sound pressure level: 89dBA.

Sound power level: 92dBA.


Vibration level: 1.2m/s².

Overall length: 240mm.

*Based on a 15 second cycle per minute average use.



*Based on a 15 second cycle per minute average use.



Model Number	Disc Size	Free Speed (rpm)	Weight each	Order Code
FGA120g	115mm (4 1/2")	10,000	1.95kg	-1960K
FGA130g	125mm (5")	10,000	1.96kg	-1980K

76mm Reversible Cut-off Tool

FCT076

For cutting auto panels, light sheet metal, fibreglass, nuts and bolts. Powerful 0.5HP motor. Speed regulator. Safety release throttle. Rear exhaust. Rotating air inlet. Reverse feature. Ball bearing construction. Supplied with one 76mm cutting disc (KEN230-0020K).

Disc size: 76 x 1.8 x 9.6mm (3" x 1/16" x 3/8").

Minimum air hose size (ID): 3/8" (10mm).

Air inlet thread: 1/4" NPT. **Air pressure:** 90psi/6.2bar.

Air consumption: 4cfm*. **Sound pressure level:** 98dBA.

Sound power level: 103dBA.


Vibration level: 0.5m/s².

Overall length: 185mm.

*Based on a 15 second cycle per minute average use.



*Based on a 15 second cycle per minute average use.



Free Speed (rpm)	Weight each	Order Code
18,000	950g	-1200K

ABRASIVES & POWER TOOLS